

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020314 A1

(51) International Patent Classification⁷: **B65D 83/16**

(21) International Application Number:
PCT/GB2003/003450

(22) International Filing Date: 7 August 2003 (07.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0219996.6 29 August 2002 (29.08.2002) GB

(71) Applicant (for all designated States except MN, US):
RECKITT BENCKISER INC [US/US]; 1655 Valley
Road, Wayne, NJ 07474 (US).

(71) Applicant (for MN only): **RECKITT BENCKISER (UK)
LTD** [GB/GB]; 103-105 Bath Road, Slough, Berkshire SL1
3UH (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **CORKHILL, Ian,**

James [US/US]; Reckitt Benckiser Inc, 1655 Valley Road,
Wayne NJ 07474 (US). **MORRIS, Matthew** [US/US];
Reckitt Benckiser Inc., One Phillips Parkway, Montvale,
NJ 07645 (US). **SPITZER, Leonard** [US/US]; Reckitt
Benckiser Inc, One Philips Parkway, Montvale, NJ 07645
(US).


(74) Agents: **McKNIGHT, John, Crawford et al.**; Reckitt
Benckiser Plc, Group Patents Dept., Dansom Lane, Hull
HU8 7DS (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: **OVERCAP AND ACTUATOR BUTTON FOR AEROSOL SPRAY CAN**

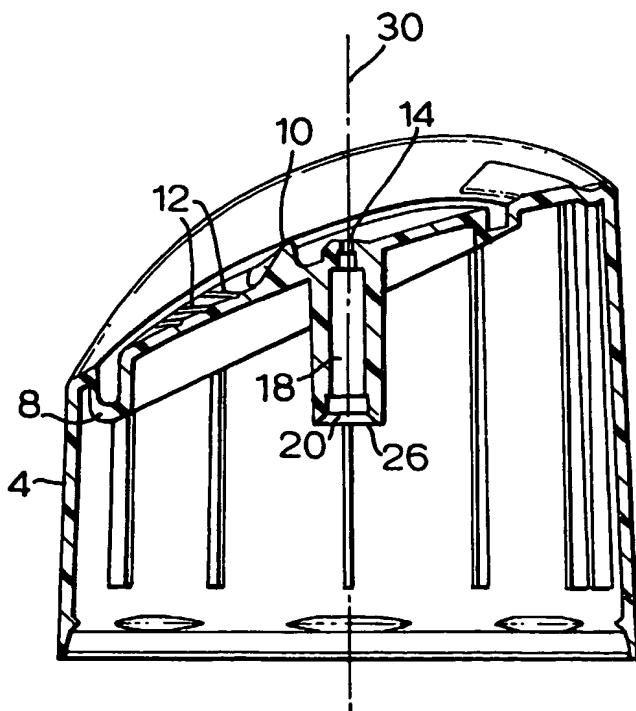

(57) Abstract: Disclosed is an overcap
(2) for an aerosol container comprising a
wall (4) capable of being attached to the
container, a button (6) having an actuating
means (10) and a cavity in the bottom
thereof adapted to sealingly receive the
free end of an aerosol valve stem having a
hollow bore which is in flow communication
with an orifice (14) in the top of said
body releasing a pressurized, liquid to be
atomized, said orifice being coaxial with
the central long axis of said cavity and
bore, and a hinge (8) attaching the button
to the wall, such that the configuration of
the hinge causes the liquid escaping from
the orifice to be dispensed along the central
long axis of the cavity as it is atomized into
an aerosol spray pattern.



Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a
patent (Rule 4.17(ii)) for all designations*

Published:

- *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

OVERCAP AND ACTUATOR BUTTON FOR AEROSOL SPRAY CAN

5

This invention relates to an actuator button for use on an aerosol spray container to deliver an atomized spray of liquid such as an air freshener and to the dies by which such an actuator button is made.

10

Aerosol actuator buttons are well known in the art and are used to atomize a pressurized liquid into a spray which can be delivered into a room or to coat an object with the atomized spray. A variety of different types and examples of actuator buttons are disclosed in United States Patent No. 4,805,839 to S. C. Johnson & Son, Inc. The actuator button disclosed in United States

15 Patent No. 4,805,839 diverts its spray away from the user by having an asymmetrical conical depression in the bottom of the button where the configuration of the conical depression causes the liquid escaping from the orifice to be tilted away from the central long axis of the cavity which receives the free end of an aerosol valve so that the central long axis of the aerosol spray pattern is tilted away from the central long axis of the cavity at a preselected angle.

20

Such an arrangement and tilting of the aerosol spray pattern can have a negative effect on the delivery and quality of aerosol product into the area which is being treated by the aerosol. The delivery and quality of aerosol product is dependent upon the atomization of the liquid which is being delivered as an aerosol through the actuator. The finer the particle size of atomization,

25 the longer the fragrance, or other material to be delivered, will stay in the room atmosphere as well as providing for a larger area of coverage due to the diffusion of the fragrance, or other material, out of the particles.

30

With that background, the present invention provides for an actuator button which provides better atomization of liquid into the air. In addition, with the spray being dispensed along the central long axis, the user will have better control over dispensing the aerosol without having to remember the angle at which the actuator button of United States Patent No. 4,805,839 is positioned.

The present invention provides an overcap for an aerosol container comprising a wall capable of being attached to the container, a button having an actuating means and a cavity in the bottom thereof adapted to sealingly receive the free end of an aerosol valve stem having a hollow bore which is in flow communication with an orifice in the top of said body for releasing a pressurized liquid to be atomized, said orifice being coaxial with the central long axis of said cavity and bore, and a hinge attaching the button to the wall, such that the configuration of the hinge causes the liquid escaping from the orifice to be dispensed along the central long axis of the cavity as it is atomized into an aerosol spray pattern. The hinge can be a torsion hinge.

It is a further object of the present invention to provide a set of dies for molding the overcap for aerosol containers of the present invention.

The present invention thus further provides, in combination, a set of dies for producing an overcap having an actuating means and a cavity in the bottom thereof adapted to sealingly receive the free end of an aerosol valve stem having a hollow bore which is in flow communication with an orifice in the top of said body for releasing a pressurized liquid to be atomized, said orifice being coaxial with the central long axis of said cavity and bore causes the liquid escaping from the orifice to be dispensed along the central long axis of the cavity as it is atomized into an aerosol spray pattern and the central long axis of said aerosol spray pattern, characterized by:

A. a male die for forming at least the cavity portion of the button and having a first upper surface, coaxial with the central long axis of the cavity, for forming the portion of the cavity closest to said orifice and

B. at least one other die for forming the remainder of said button, including said orifice, wherein any one of such dies has a cylindrical extension which is coaxial with the central long axis of said cavity and having a flat surface for contact with the first surface of said male die to form said orifice when the dies are brought together coaxial with the central long axis of the first upper surface of the male die and the flat surface of said other die to form said button, said orifice being coaxial with respect to said central long axis of the die forming the cavity.

The dies can be withdrawn along the line which is coaxial with the central long axis of the button being molded and thereby permit more buttons to be molded per area of mold plate than is the

case when a side pin is used to create an orifice with respect to the central long axis of the button. The dies can be made of conventional metals used in molding dies such as H13 and S7 type steels, oil-hardened tool steels, air-hardened tool steels, aluminum and the like.

5 The following is a brief description of the drawings showing an embodiment of the present invention:

Fig. 1 is a perspective view of an overcap taken from the top rear.

Fig. 2 is a bottom plan view of Fig. 1.

Fig. 3 is a perspective view of the overcap taken from the bottom.

10 Fig. 4 is a cross-sectional view of the overcap of Fig. 2, taken along section lines A-A.

Fig. 5 is a cross-sectional view of the overcap of Fig. 2, taken along section lines B-B.

Referring to the drawings, Figs. 1 and 2 show one embodiment of the aerosol actuator button of the present invention. Overcap 2 is can be fixed on a conventional pressurized aerosol
15 container (not shown). Overcap 2 is composed of a wall 4 and aerosol actuator button 6 which is joined to wall 4 by means of a plastic hinging strip 8. Button 6 contains an actuating means in the form of a depressed finger pad 10 having a number of raised ridges 12. Button 6 also contains an orifice 14 where aerosolized fluid is discharged. Also shown is tamper evident tab 16, which is optional, which connects button 6 to inside rim 15 of wall 4 during manufacture of
20 the overcap. After the first use, tab 16 is no longer connected to rim 15 and the user can then tell if the overcap has been used.

Fig. 3 shows a perspective view of cap 2 from the bottom. Tubular extension 18 has cavity 20
25 which runs through the entire extension 18 and is in fluid communication with orifice 14. At its lower end, cavity 20 has a wider portion 26 (shown in Figs. 4 and 5) which sealingly engages the outside of a conventional tubular valve stem (the valve stem which is part of a valve assembly connected to a pressurized can; not shown). The valve stem has a central hollow bore which is in flow communication with cavity 20 and the pressurized liquid in the container. Orifice 14, cavity 20, and the bore hole of the valve stem are all co-axial with the central long
30 axis 30 of button 6.

Thus in practice, pressurized liquid passes through the hollow valve stem bore when finger pad 10 is depressed and travels under pressure through cavity 20 and through orifice 14 where it

contacts the atmosphere and the pressurized liquid is then aerosolized into fine droplets in the atmosphere.

5 Actuator buttons of the present invention can therefore be used in any application where an aerosol is used to deliver a useful liquid composition, such as in air freshener delivery containers, carpet and other fabric care applications, and insecticide or germicide dispensing in the form of aerosol sprays. Any of the commonly used plastic materials for aerosol buttons and overcaps such as high density polyethylene as well as polypropylene can be employed. Other
10 modifications and variations of the buttons and dies of the present invention will become apparent to those skilled in the art from the examination of the above specification and drawings. Thus, other variations of the spray actuator button and dies for making the same may be made which fall within the scope of the appended claims, even though such variations were not specifically discussed above.

15

Claims:

1. An overcap for an aerosol container comprising a wall capable of being attached to the container, a button having an actuating means and a cavity in the bottom thereof adapted to sealingly receive the free end of an aerosol valve stem having a hollow bore which is in flow communication with an orifice in the top of said body for releasing a pressurized liquid to be atomized, said orifice being coaxial with the central long axis of said cavity and bore, and a hinge attaching the button to the wall, such that the configuration of the hinge causes the liquid escaping from the orifice to be dispensed along the central long axis of the cavity as it is atomized into an aerosol spray pattern.
2. The overcap of claim 1 wherein the hinge is a torsion hinge.
3. An overcap for an aerosol container comprising a wall capable of being attached to the container, a button having an actuating means and a cavity in the bottom thereof adapted to sealingly receive the free end of an aerosol valve stem having a hollow bore which is in flow communication with an orifice in the top of said body for releasing a pressurized liquid to be atomized, said orifice being coaxial with the central long axis of said cavity and bore, and a torsion hinge attaching the button to the wall, such that the configuration of the torsion hinge causes the liquid escaping from the orifice to be dispensed along the central long axis of the cavity as it is atomized into an aerosol spray pattern.

1/3

Fig.1.


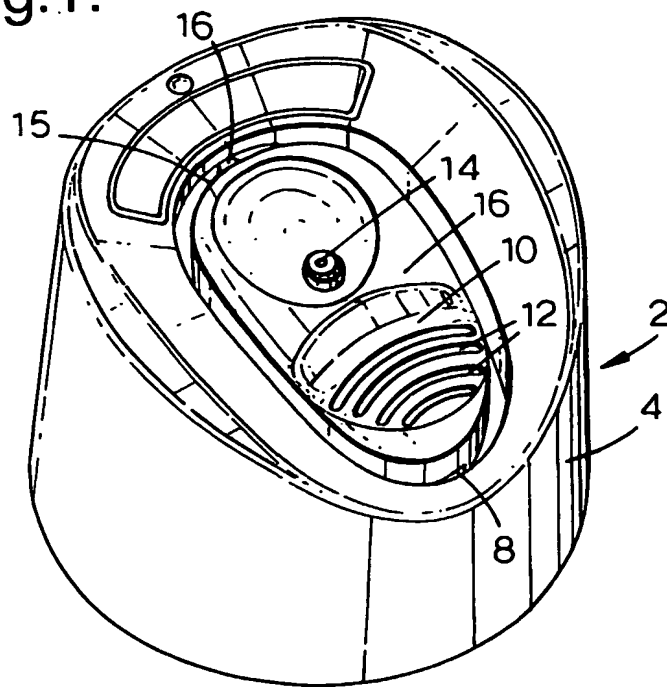


Fig.2.

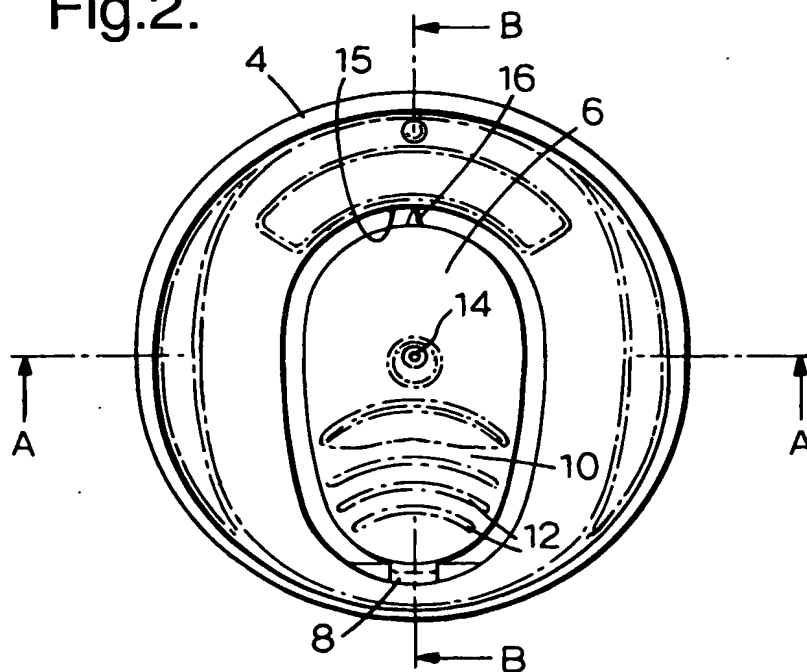

2/3

Fig.3.

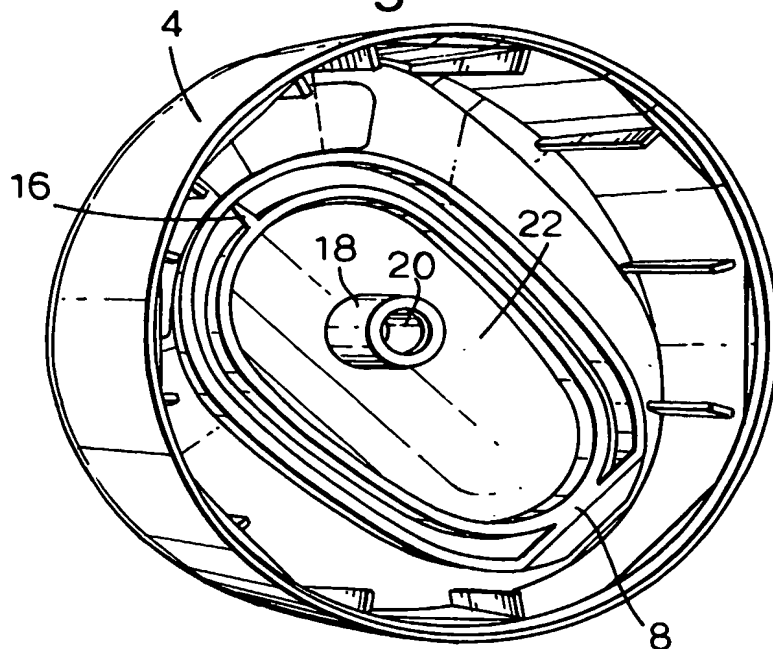


Fig.4.


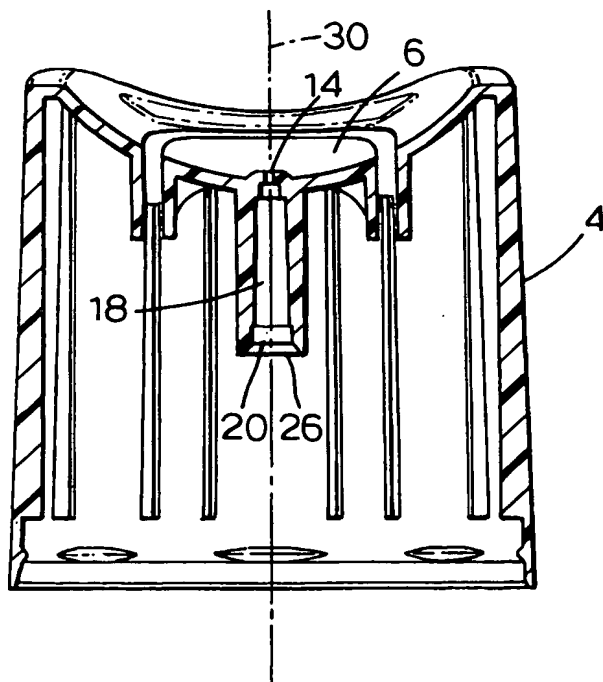


Fig.5.

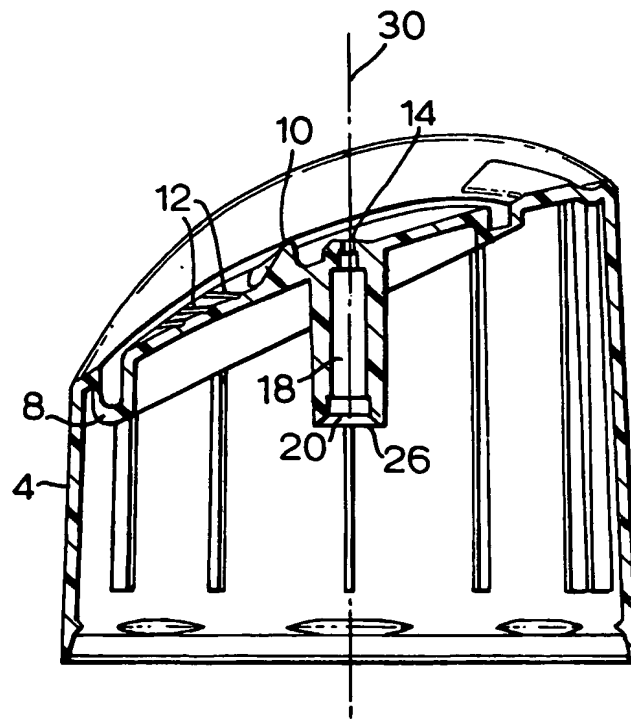

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/GB 03/03450

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65D83/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 277 004 A (BARLICS JOHN J) 7 July 1981 (1981-07-07) column 3, line 49 - column 4, line 23; figures 1,2 ---	1-3
X	US 5 641 095 A (DE LAFORCADE VINCENT) 24 June 1997 (1997-06-24) column 3, line 1 - line 42; figures 1,2 ---	1-3
A	EP 0 341 636 A (JOHNSON & SON INC S C) 15 November 1989 (1989-11-15) column 1, line 8 - line 15 column 1, line 48 - line 51; figures 1,3 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

26 November 2003

Date of mailing of the international search report

04/12/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mans-Kamerbeek, M

INTERNATIONAL SEARCH REPORT

Int ional Application No

PCT/GB 03/03450

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4277004	A	07-07-1981	NONE	
US 5641095	A	24-06-1997	FR 2727390 A1 DE 69500764 D1 DE 69500764 T2 EP 0714836 A1 ES 2108544 T3	31-05-1996 30-10-1997 12-03-1998 05-06-1996 16-12-1997
EP 0341636	A	15-11-1989	US 4805839 A AT 87581 T AU 612834 B2 AU 3463789 A CA 1333168 C DE 68905656 D1 DE 68905656 T2 EP 0341636 A2 ES 2039744 T3 GR 3009557 T3 JP 1877671 C JP 2149359 A JP 6000213 B NZ 228975 A PT 90457 A ,B	21-02-1989 15-04-1993 18-07-1991 16-11-1989 22-11-1994 06-05-1993 02-09-1993 15-11-1989 01-10-1993 28-02-1994 07-10-1994 07-06-1990 05-01-1994 25-09-1991 30-11-1989